


FTTx Flat Drop Cable (GSW)

Easy-strippable Access Drop Cable for simple installation.

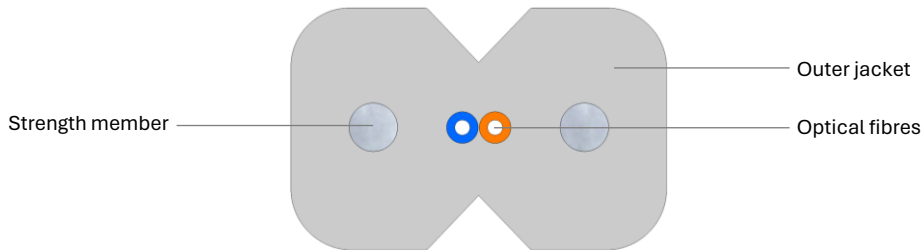

Fiber count	Up to 4
Fiber Type	G.657.A1, G.657.A2
Fiber color	Blue, Orange, Green, Brown
Strength member	Steel wire
Outer jacket	UV resistant Halogen-free flame-retardant thermoplastic compound
Outer dimensions	3.1 x 2.0 mm

Max. Tensile Loading (Short Term)	150 N
Max. Tensile Loading (Long Term)	45 N
Max. compressive loading	1000 N/100 mm
Max. Impact loading	2 Nm
Min. bend radius not load	15 x OD
Min. bend radius load	20 x OD
Operating temperature range	-20°C to +60°C
Storage temperature range	-20°C to +60°C
Installation temperature range	-5°C to +50°C
Class of fire reaction	Eca

Test procedures EN IEC 60793-1-40, EN IEC 60794-1-2, EN 13501-6

Cable Code (Ordering Code)

1 Fibre	OPK-U-DRPM-1(1×0,25)FFZH-xx-yy
2 Fibres	OPK-U-DRPM-2(2×0,25)FFZH-xx-yy
4 Fibres	OPK-U-DRPM-4(4×0,25)FFZH-xx-yy

xx – fiber type , yy – jacket color (see Cable code datasheet)

Print legend	Manufacturer-Cable type – lot number- length marking per 1 m (customer print legend available on request)
Delivery length	1000 m ±5% on plywood reel