


Multitube Microcable (CC)

Multitube micro cable for external installation by air-blowing technique

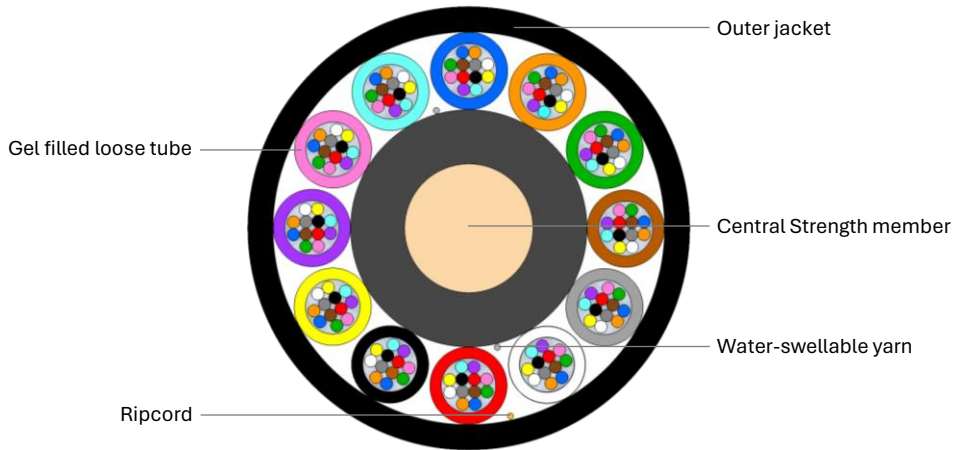

Fibre Type	G.657.A1, G.657.A2, OM1, OM2, OM3, OM4
Fibre colour	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube colour 1-12	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube colour 13 - 18	Blue ^{BS} , Orange ^{BS} , Green ^{BS} , Brown ^{BS} , Grey ^{BS} , White ^{BS}
Central strength member	FRP rod (coated if necessary)
Ripcord	1x under outer jacket
Outer jacket material	UV resistant black HDPE
Outer jacket thickness	0.5 mm

^{BS} Black strip

	12	24	36	48	60	72	96	144	192	216	288	432	
Number of fibres	12	24	36	48	60	72	96	144	192	216	288	432	
Number of fibres in tube	12	12	12	12	12	12	12	12	12	12	12	12	
Tube count (layers)	1	2	3	4	5	6	8	12	5+11	6+12	9+15	6+12+18	
Filler count	4	3	2	1	0	0	0	0	0	0	0	0	
Nominal outer diameter (mm)	5.1	5.1	5.1	5.1	5.1	5.7	6.5	8.6	8.3	8.7	10.0	11.7	
Calc. cable weight (kg/km)	23	23	23	23	23	26	39	63	54	61	88	111	
Short-term tensile strength (N)	470	470	470	470	470	800	1800	2800	470	800	2900	800	IEC 60794-1-101
Long-term tensile strength (N)	230	230	230	230	230	420	1100	2000	230	420	1800	420	IEC 60794-1-101
Crush resistance (N/100 mm)							700						IEC 60794-1-103
Max. impact loading (Nm)							3						IEC 60794-1-104
Min. bend radius not load (OD)							10						IEC 60794-1-111
Min. bend radius load (OD)							20						IEC 60794-1-111
Operating temperature range (°C)							-30 to +70						IEC 60794-1-201
Storage temperature range (°C)							-40 to +70						IEC 60794-1-201
Installation temperature range (°C)							-15 to +50						IEC 60794-1-201
Water tightness (1 m / 24 hrs.)							No leakage						IEC 60794-1-205
Class of fire reaction							Fca						EN 50575, EN 13501-6

Number of Fibers	Cable Code (Ordering Code)	Delivery length	Packing
12	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
24	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
36	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
48	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
60	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
72	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
96	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
144	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
192	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
216	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
288	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel
432	OPK-O-MTFDM-12(5x1.5)LTP-xx-BK	2100 m ± 5% , 4200 m ± 5%	Plywood reel

xx – fibre type (see Cable code datasheet)

Print legend: Manufacturer - Cable type – lot number- length marking per 1 m (customer print legend available on request)

Note: Cable marking using the Hot-foil method is done in white. If overprinting is necessary, the color of the text is yellow.

OPTOKON Kable Co., Ltd., s.r.o. reserves the right to make changes in this specification without prior notice.